Polaroid

P8600

Retransfer Card Printer

Polaroid P8600's retransfer printing technology allows you to print full color, edge-to-edge images in brilliant true color. It offers high speed printing with 600 dpi print resolution and comes available with an optional encoder and laminator for additional security and durability.




Versatility

- Encoding functionality (magnetic, contact IC, RFID)
- Laminator connection (single/dual side)
- · Various media substrates and security features available

Durability

- Dual InTM film protection INTM2
- Patch/Overlay layer security

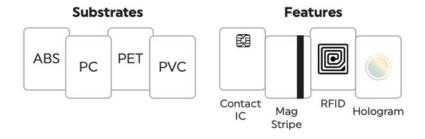




High-Quality

The 600DPI print resolution allows printing small characters (microtext) as a security feature.

Polaroid

Authorized Licensee



Polaroid


Secure

The Security Erase function (patented) prevents leakage of personal information on the ink ribbon. It scrambles information beyond recognition to protect this data.



Security Erase

For network security, the printer supports IPSec (IPv6 / IPv4). Encryption protects personal information on a network.



Applications

- Corporate ID Cards
- Student ID Cards
- Gift Cards
- Loyalty Cards
- Membership Cards
- Transportation Cards



Polaroid

Authorized Licensee

Polaroid

P8600

Specifications

Printing System Dye sublimation re-transfer

Printing Resolution 600dpi x 600dpi

Printable Area Edge to edge printing over the card surface

Print Speed 27.5 seconds / single sided (YMCK) 55 seconds / dual sided

Cards Thickness: 0.25mm ~ 1.00mm

Size: 54.0mm x 85.6mm

Card Hopper 100 cards (250 cards hopper under development)

Interface USB 2.0 (Hi-speed / Full Speed) Ethernet

(100BASE-TX / 10BASE-T)

Software Microsoft® Windows®10 32bit/64bit

Environment Microsoft® Windows®8 (including 8.1) 32bit/64bit

(Driver & Tools) Microsoft® Windows®7 (SP1) 32bit/64bit

Microsoft® Windows® Server 2012 64Bit

Microsoft® Windows® Server 2008 R2 (SP1) 64Bit

Operating Temperature: 15°C to 30°C

Environment Humidity: 35% to 70% (YMCK ink, No condensation)

Conditions

Weight Approximately 13.7kg

Dimensions 343mm x 335mm x 322mm (W x H x D) (without card stacker)

Consumables YMCK Ink Ribbon: 1000 images/roll

Re-Transfer Film: 1000 images/roll

Options Magnetic Stripe Encoder

Contact/Contactless Encoder







Polaroid

Authorized Licensee

Singapore (HQ) All ID Asia Pte Ltd +65-6778-0075 enquiry@allid.com.sg www.allid.com.sg Malaysia All ID Asia Sdn Bhd +603-8075-1888 enquiry@allid.com.my www.allid.com.my Indonesia PT All ID Indonesia +62 21-4517-330 enquiry@allid.co.id www.allid.co.id Myanmar All ID Myanmar +959-777499949 enquiry@allid.com.mm www.allid.com.mm Philippines
All ID Philippines Inc.
+632 224 2042
enquiry@allid.com.ph
www.allid.com.ph

Asia-Pacific Sales Representations: Bangladesh, Brunei, Cambodia, China, Hong Kong, India, Indonesia, Laos, Macau, Malaysia, Myanmar, Philippines, Singapore, Sri Lanka, Thailand, Vietnam

Product features, specifications and appearances are subject to change without notice. This product is manufactured, distributed, and sold by All ID Asia. © 2023 All Rights Reserved. Polaroid, Polaroid Color Spectrum, and Polaroid Classic Border Logo are trademarks of PLR IP Holdings, LLC used under license. All other trademarks are the property of the respective owner, who has not sponsored, endorsed or approved this product. PLR IP Holdings, LLC does not manufacture this product or provide any Manufacturer's Warranty or support.